





Power Puck Inductor Series



1. Features:

- Compact design to save space .
- Excellent DC Bias performance.
- Inductance:3.3uH to 1000uH . Custom values are welcomed.
- Operating Temperature Range -40°C to + 150°C ,RoHs & HF compliance.

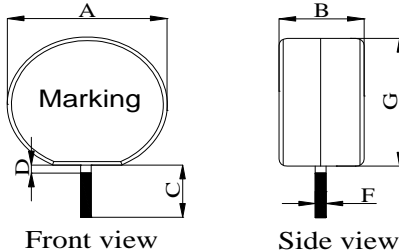

2. Mechanical Dimension(Unit:mm):

Part Number	A	B	C	D	E	F*	G
	Max.	Max.	± 1.0	Max.	± 1.0	± 0.1	Max.
PP3220	32.0	22.0	17.0	1.5	10.5	See below table	33.0
PP4020	40.0	22.0	17.0	1.5	10.3		41.0

3. Electrical Characteristic of Power Puck :

Part Number	Inductance (uH)	DCR (mΩ)	DCR (mΩ)	I _{rms} (A)	L@I _{rms} (A)	I _{max} (A)	L@I _{max} (A)	F* (mm)
	10%,15% or 20%	Typ.	Max.	@25°C	Ref.	@25°C	Ref.	± 0.1
PP4020-3R3MHF	3.3 , 20%	1.07	1.30	50.00	2.85	75.00	2.60	2.60
PP4020-4R7MHF	4.7 , 20%	1.28	1.55	40.00	4.10	60.00	3.70	2.60
PP4020-100MHF	10 , 20%	3.53	4.50	33.00	8.90	53.00	8.60	2.00
PP4020-150MHF	15 , 20%	5.64	7.00	32.00	13.00	50.00	12.40	1.80
PP4020-200LHF	20 , 15%	6.60	8.00	29.00	17.20	45.00	15.20	1.70
PP4020-300LHF	30 , 15%	9.23	11.00	25.00	25.50	41.00	23.20	1.70
PP3220-500KHF	50 , 10%	19.35	23.30	12.00	48.70	18.00	47.20	1.30
PP4020-500LHF	50 , 15%	14.04	17.00	23.00	43.50	35.00	36.90	1.60
PP3220-101KHF	100 , 10%	35.62	43.00	10.00	95.70	13.00	93.20	1.10
PP4020-121KHF	120 , 10%	33.69	40.50	13.00	112.50	15.00	111.20	1.40
PP3220-221KHF	220 , 10%	73.30	88.00	7.00	210.90	9.00	205.70	0.90
PP4020-251KHF	250 , 10%	50.60	61.00	9.50	205.70	12.00	190.00	1.20
PP3220-331KHF	330 , 10%	113.65	136.50	5.50	316.80	7.50	307.60	0.80
PP4020-501KHF	500 , 10%	106.62	128.00	7.00	409.50	9.00	372.40	1.00
PP3220-102KHF	1000 , 10%	325.00	390.00	4.00	826.50	5.60	727.90	0.60
PP4020-102KHF	1000 , 10%	235.00	282.00	4.50	857.10	6.50	764.20	0.80

Note:

- 1>.Open Circuit Inductance (OCL) test condition:300KHz,0.25Vrms,0Adc ,at 25°C .
- 2>.Full Load Inductance (FLL) Test condition:300KHz,0.25Vrms ,I_{sat} ;(T_a=25°C).
- 3>.I_{rms}:the DC current required to raise the component temperature by 40°C .
I_{max}: the DC current required to raise the component temperature by 100°C .

4. Inductance Characteristics (Inductance vs. Current):

Taiwan 886.2.2698.9699 ● Dongguan 86.769.8791.5567 ● Suzhou 86.512.6832.1472

sales@easymagnet.com.tw ● www.easymagnet.com.tw


Revision K: 11/22/11



Power Puck Inductor Series



Inductance vs. Current

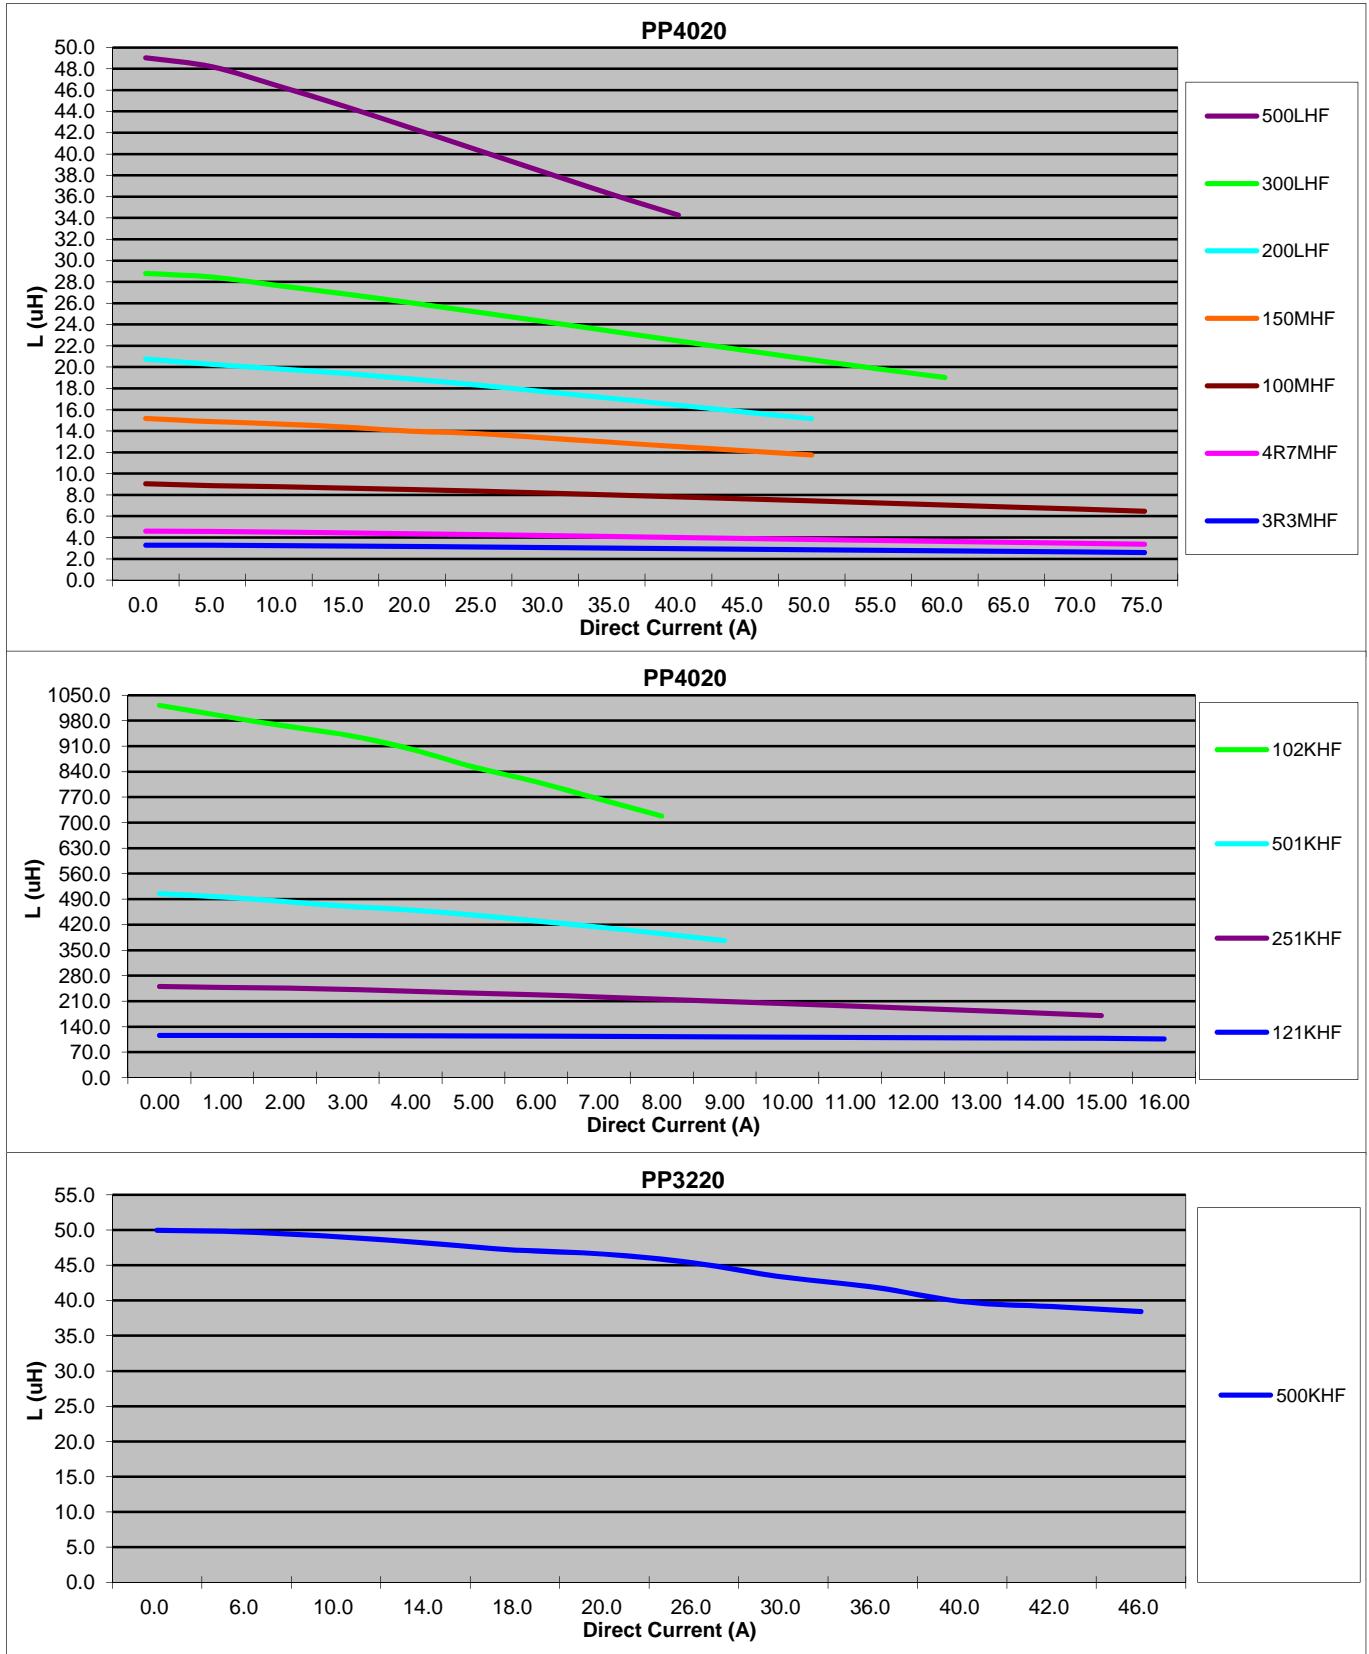

Taiwan 886.2.2698.9699 • Dongguan 86.769.8791.5567 • Suzhou 86.512.6832.1472

sales@easymagnet.com.tw • www.easymagnet.com.tw


Revision K: 11/22/11



Power Puck Inductor Series



Inductance vs. Current

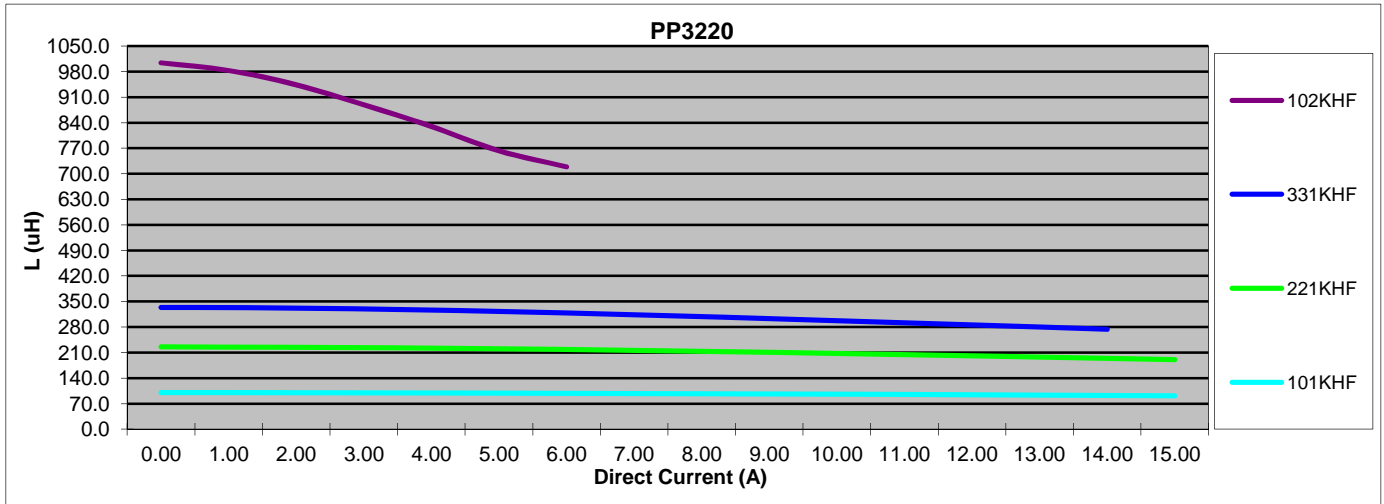

Core Loss Curve

